




NRV - 08 -

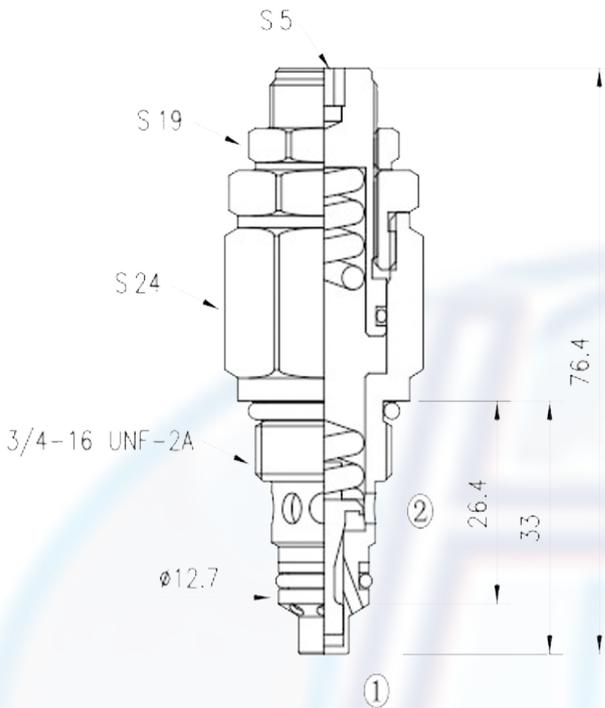

SPECIFICATION:

| | |
|-----------------------|----------------------|
| Max working pressure: | 300bar |
| Flow max: | see performant chart |
| Internal leakage: | <10cc/min/300bar |
| Filtration of oil: | 25m or better |
| Temperature: | -30 ~ +110°C |
| Cavity: | 08 - 2 |
| Installatin torque: | 30 ~ 33Nm |

PERFORMANCE

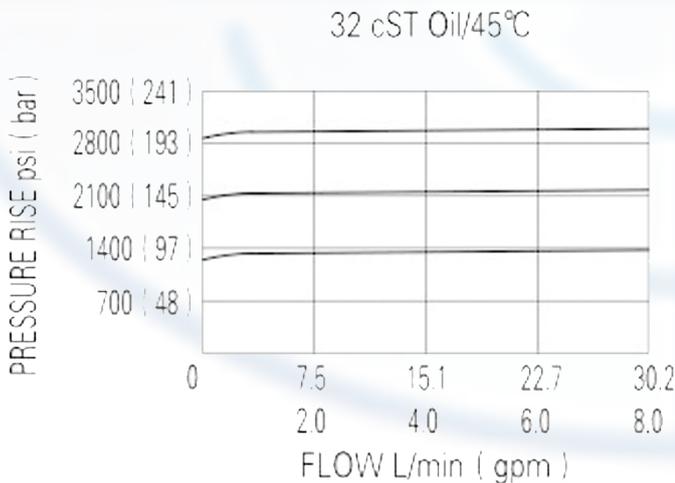

The valve prevents flow from 1 to 2 until the set crack pressure at 1 is achieved.

The poppet then unseats allowing flow from 1 to 2 protecting the circuit from over pressurization.

to order:

NRV - 08 -

Directly operated relief valves

Cavity

PRESS RANGE:

12 = 20 ~ 125bar, preset : 80bar

18 = 55 ~ 180bar, preset : 140bar

30 = 120 ~ 300bar, preset : 200bar