




MR - 10 - 3

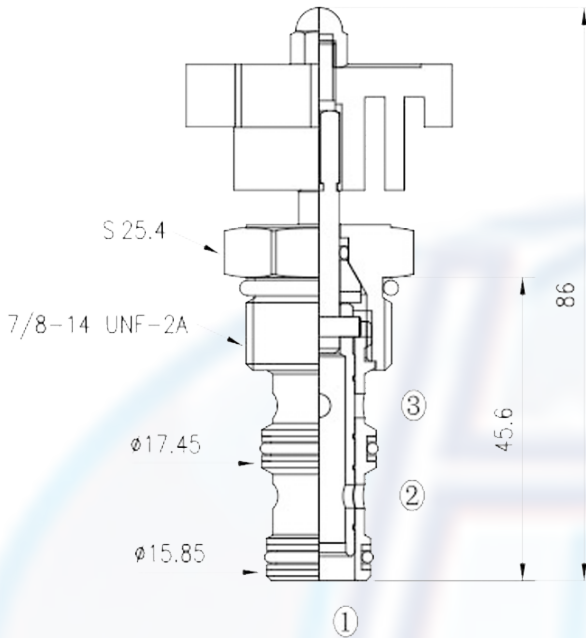

SPECIFICATION:

Max working pressure:	210bar
Flow max:	see performant chart
Internal leakage:	160cc/min/210bar
Filtration of oil:	25m or better
Temperature:	-30 ~ +110°C
Cavity:	10 - 3
Installatin torque:	34 ~ 37Nm

PERFORMANCE

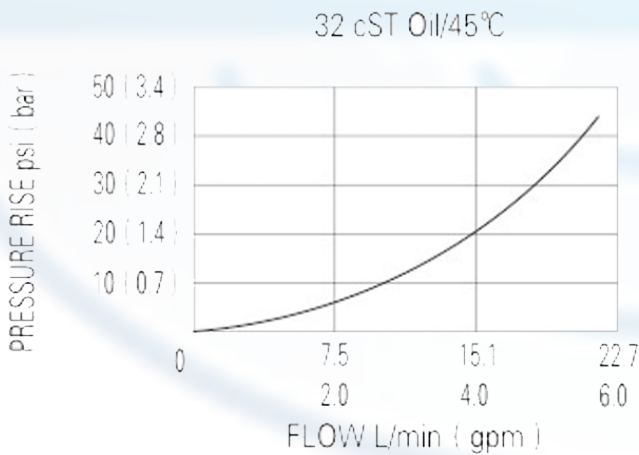

This valve will direct flow between ports 1 and 3 and block port 2 in one position, and by turning the operator 90°, flow will be directed between ports 1 and 2, ports 3 will be blocked. during cross-over transition, all ports are blocked.

to order:

