
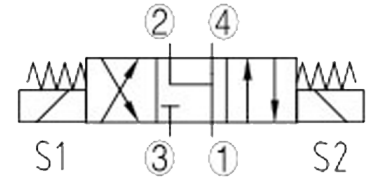



SV - 08 - 34Y

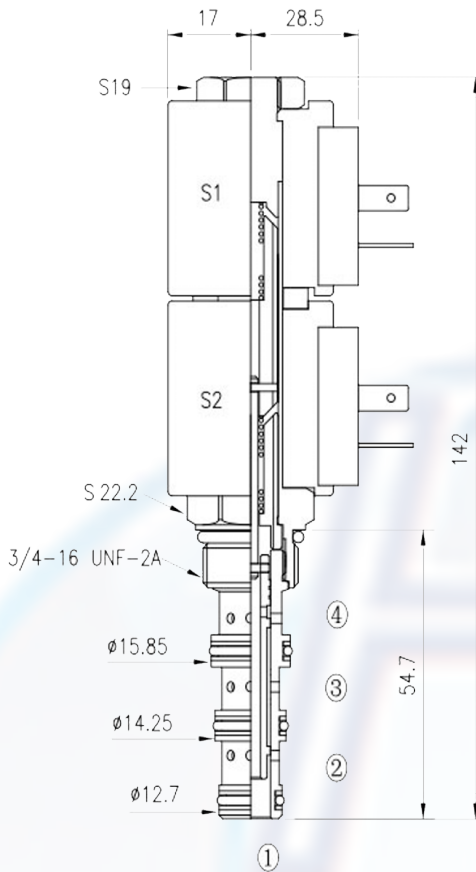

SPECIFICATION:

- Max working pressure: 210bar
 - Flow max: see performant chart
 - Internal leakage: <82cc/min / 210bar
 - Filtration of oil: 25m or better
 - Temperature: -30 ~ +110°C
 - Cavity: 08 - 4
 - Installatin torque: 25 ~ 28Nm
 - Coil rating: 85% ~110%
- Continuous from 85% to 110% of rated voltage

PERFORMANCE 32 cST Oil/45°C

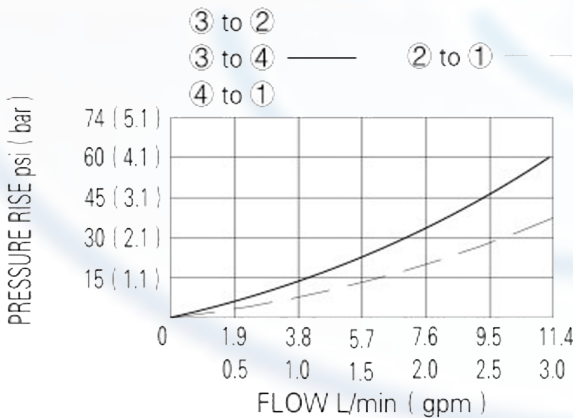

When de-energized, the valve allows flow between the 1, 2, and 4 ports with the 3 port blocked. when the upper solenoid is energized, the valve allows flow between the 2 and 1 parts and the 3 and 4 parts. when the lower solenoid is energized the valve allows flow between the 4 and 1 ports and the 3 and 2 parts.

to order:

SV - 08 - 34Y - -

coil connection:
D = Double Lead
H = Hirschmann

voltage:

- 12 = 12V DC
- 24 = 24V DC
- 110 = 110V AC
- 220 = 220V AC