



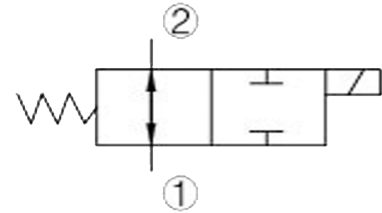


# SV2 - 10 - 2NOS

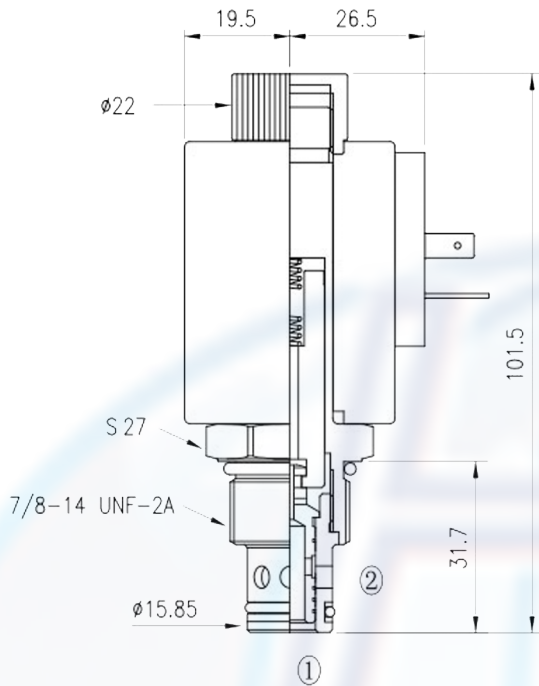

### SPECIFICATION:

- Max working pressure: 210bar
  - Flow max: see performant chart
  - Internal leakage: <82cc/min / 210bar
  - Filtration of oil: 25m or better
  - Temperature: -30 ~ +100°c
  - Cavity: 10 - 2
  - Installatin: 34 ~ 37Nm
  - Coil rating: 85% ~110%
- Continuous from 85% to 110% of rated voltage

### PERFORMANCE

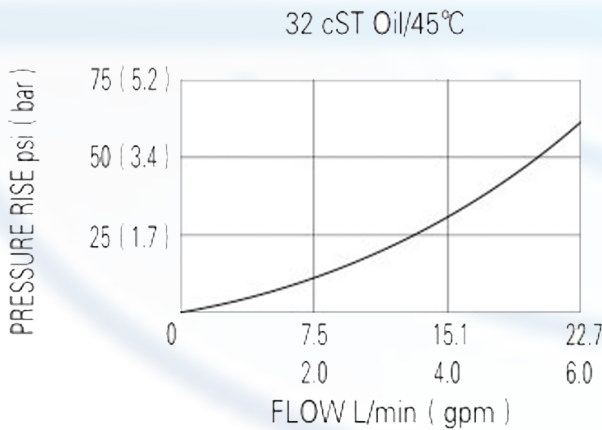

When energized, the valve blocks flow in both directionals, when de-energized, allowing flow from 2 to 1 and 1 to 2.

to order:

SV2 - 10 - 2NOS

cavity

function



coil connection:

- D = Double Lead
- H = Hirschmann

voltage:

- 12 = 12V DC
- 24 = 24V DC
- 110 = 110V AC
- 220 = 220V AC